

# nifty

# 170SD

**SELF DRIVE  
ACCESS PLATFORM**



**17.10m (56ft 1in)**  
Working height

**8.70m (26ft 6in)**  
Working outreach

### **Weight Saving Design**

Easily transported & manoeuvred on site

### **Telescopic Upper Boom**

Greater accuracy when positioning the platform

### **Bi-Energy Available**

Optimises utilisation

### **Hydraulic Outriggers**

Quick & easy to set up

### **Fully Proportional Hydraulic Controls**

Quick & easy to service

### **Platform Rotation**

Better access to applications



**niftylift.com**




# nifty 170SD

The Nifty **170SD** combines the best of our self-propelled and trailer mounted ranges. It offers the same staggering reach capabilities as the **Nifty 170** but with the versatility of a robust yet very lightweight drivable base. This allows the operator to manoeuvre, set up and operate this machine without leaving the platform, especially on uneven surfaces.

## SAFETY FEATURES

- Pressure sensitive outriggers with
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders
- CE Mark




The **170SD's** outstanding reach makes it ideal for construction site work.

Also available trailer mounted. See **Nifty 170** specification sheet.



Rough terrain tyres as standard and the 4WD option allow the **170SD** to manoeuvre easily over a wide range of site conditions.

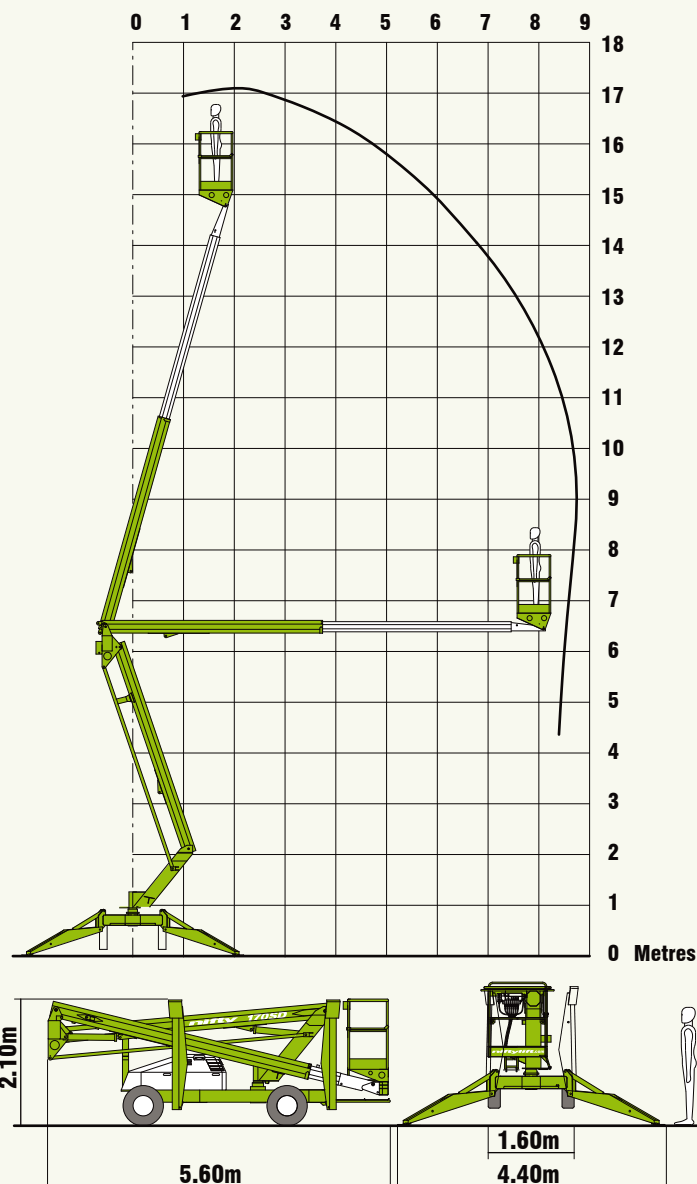

## SPECIFICATIONS

<b>Working Height</b>	17.10m	56ft 1in
<b>Platform Height</b>	15.10m	49ft 6in
<b>Working Outreach</b>	8.70m	26ft 6in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.60m	5ft 3in
<b>- Working</b>	4.40m	14ft 4in
<b>Height</b>	2.10m	6ft 11in
<b>Length</b>	5.60m	18ft 4in
<b>Minimum Weight</b>	2750kg*	6000lbs*
<b>Turning Radius - Inside</b>	2.25m	7ft 5in
<b>- Outside</b>	5.20m	17ft
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 7in x 2ft 2in
<b>Drive Speed</b>	5.0kph	3.0mph
<b>Gradeability</b>	25% (2x4)	30% (4x4)
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power Options</b>	Battery Only Petrol or Diesel Only Bi-Energy (Engine and Battery)	

\*Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

**Manufacturers of trailer mounted,  
self propelled and vehicle mounted platforms.**

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

www.niftylift.com  
e-mail: info@niftylift.com  
Tel.: +44 (0)1908 223456  
Fax: +44 (0)1908 312733

